
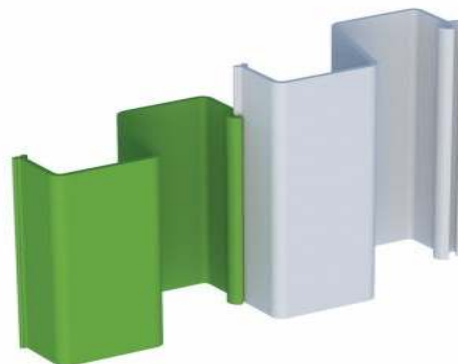


GW 300/5.5 Date Tehnice(SI)

*Garantăm
o alegere durabilă*

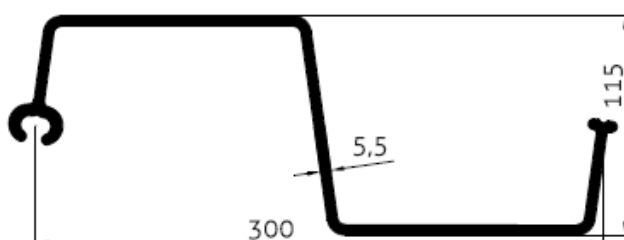

Momentul maxim admisibil (M)	kNm/m	7,00	Modulul de elasticitate (E)	N/mm ²	2.600
Grosimea (t)	mm	5,5	Rezistenta la impact	J/m ²	15
Modul de Inertie (rezistenta) (W)	cm ³ /m	320	Inaltimea in sectiune	cm	11,5
Moment de Inertie (I)	cm ⁴ /m	1842	Latimea in sectiune	cm	30
Rezistenta la intindere	N/mm ²	55-60	Stabilizat UV	-	DA
Limita de curgere	N/mm ²	40	Ambalarea standard	bucati/ pachet	28
			Masa	kg/ml	4,3

Proprietatile geometrice si de rezistenta sunt calculate pentru centrul geometric al piesei.
 Informatiile din acest document sunt presupuse adevarate si corecte.
 Folosirea unui anumit model de palplansa pvc, instalarea si functionalitatea sunt hotarate si asumate de proiectant.

Fabricat de:
Pietrucha Sp. z o.o.
 Ksawerow , Lodz, Poland



VINYL SHEET
 PILING

Produs agrementat de INCERC:
Nr. 001SB-01/383-2014

IULIE 2015