
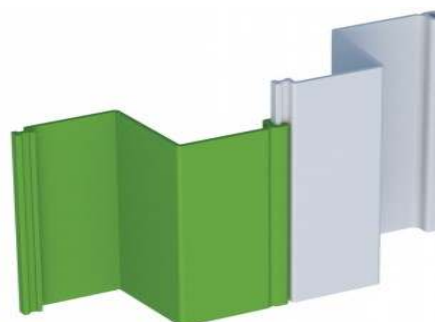


## GW 458/10.4 Date Tehnice(SI)

*Garantăm  
o eleganță durabilă*

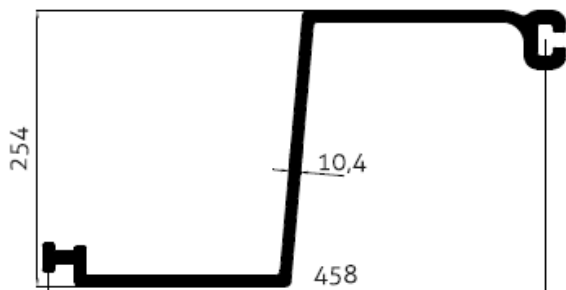

Momentul maxim admisibil (M)	kNm/m	33,9	Modulul de elasticitate (E)	N/mm <sup>2</sup>	2.600
Grosimea (t)	mm	10,4	Rezistenta la impact	J/m <sup>2</sup>	15
Modul de Inertie (rezistenta) (W)	cm <sup>3</sup> /m	1541,5	Inaltimea in sectiune	cm	25,4
Moment de Inertie (I)	cm <sup>4</sup> /m	20718	Latimea in sectiune	cm	45,8
Rezistenta la intindere	N/mm <sup>2</sup>	55-60	Stabilizat UV	-	DA
Limita de curgere	N/mm <sup>2</sup>	40	Ambalarea standard	bucati/ pachet	N/A
			Masa	kg/ml	-

Proprietatile geometrice si de rezistenta sunt calculate pentru centrul geometric al piesei.  
 Informatiile din acest document sunt presupuse adevarate si corecte.  
 Folosirea unui anumit model de palplansa pvc, instalarea si functionalitatea sunt hotarate si asumate de proiectant.

Fabricat de:  
**Pietrucha Sp. z o.o.**  
 Ksawerow , Lodz, Poland



Prodotus agrementat de INCERC:  
**Nr. 001SB-01/383-2014**

IULIE 2015