
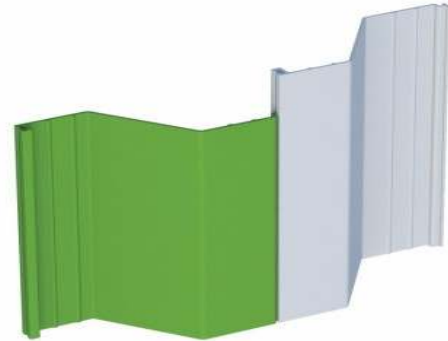


GW 565/9 Date Tehnice(SI)

*Garantăm
o alegere durabilă*

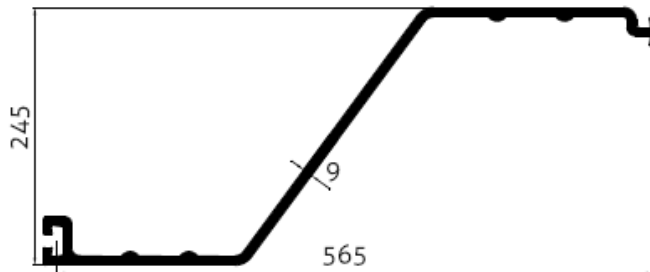

Momentul maxim admisibil (M)	kNm/m	22,9	Modulul de elasticitate (E)	N/mm ²	2.600
Grosimea (t)	mm	9	Rezistenta la impact	J/m ²	15
Modul de Inertie (rezistenta) (W)	cm ³ /m	1042	Inaltimea in sectiune	cm	24,5
Moment de Inertie (I)	cm ⁴ /m	12768	Latimea in sectiune	cm	56,5
Rezistenta la intindere	N/mm ²	55-60	Stabilizat UV	-	DA
Limita de curgere	N/mm ²	40	Ambalarea standard	bucati/ pachet	N/A
			Masa	kg/ml	-

Proprietatile geometrice si de rezistenta sunt calculate pentru centrul geometric al piesei.
Informatiile din acest document sunt presupuse adevarate si corecte.
Folosirea unui anumit model de palplansa pvc, instalarea si functionalitatea sunt hotarate si asumate de proiectant.

Fabricat de:
Pietrucha Sp. z o.o.
Ksawerow , Lodz, Poland



Prodotus agrementat de INCERC:
Nr. 001SB-01/383-2014

IULIE 2015