
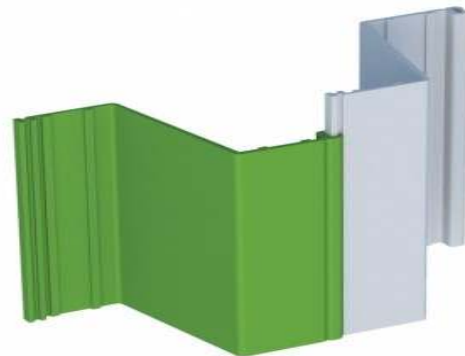


## GW 580/9

### Date Tehnice(SI)

*Garantăm  
o eleganță durabilă*

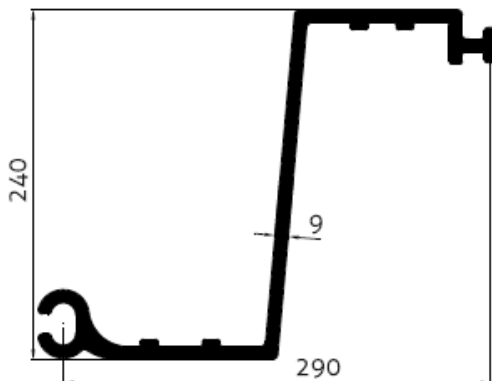

Momentul maxim admisibil (M)	kNm/m	32,2	Modulul de elasticitate (E)	N/mm <sup>2</sup>	2600
Grosimea (t)	mm	9	Rezistenta la impact	J/m <sup>2</sup>	15
Modul de Inertie (rezistenta) (W)	cm <sup>3</sup> /m	1461,6	Inaltimea in sectiune	cm	24
Moment de Inertie (I)	cm <sup>4</sup> /m	18739	Latimea in sectiune	cm	25
Rezistenta la intindere	N/mm <sup>2</sup>	55-60	Stabilizat UV	-	DA
Limita de curgere	N/mm <sup>2</sup>	40	Ambalarea standard	bucati/ pachet	82
			Masa	kg/ml	7,7

Proprietatile geometrice si de rezistenta sunt calculate pentru centrul geometric al piesei.  
 Informatiile din acest document sunt presupuse adevarate si corecte.  
 Folosirea unui anumit model de palplansa pvc, instalarea si functionalitatea sunt hotarate si asumate de proiectant.

Fabricat de:  
**Pietrucha Sp. z o.o.**  
 Ksawerow , Lodz, Poland



Produs agrementat de INCERC:  
**Nr. 001SB-01/383-2014**

IULIE 2015